



ARCOPTIX FTIR KIT

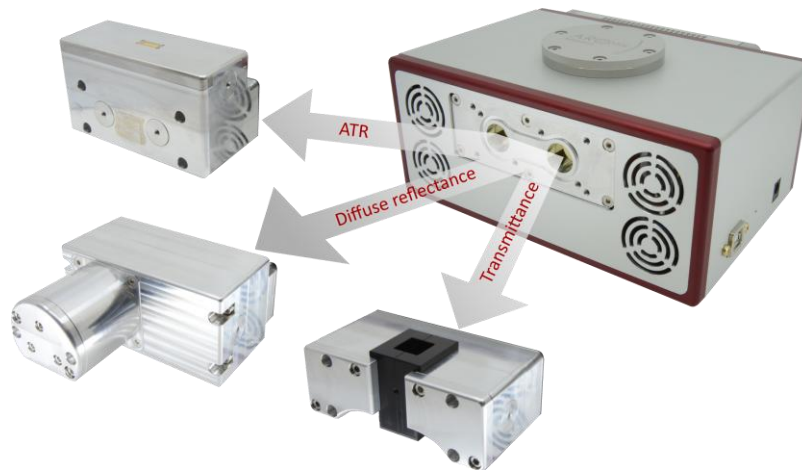


The ARCOptix **FTIR KIT** is a selected set of building blocks that can be seamlessly mounted on the instrument to perform various measurements, offering a compact and highly performant FTIR based platform.


The **ATR** module consists of a 3 bounce ZnSe ATR crystal designed to measure liquids or suspended solutions.

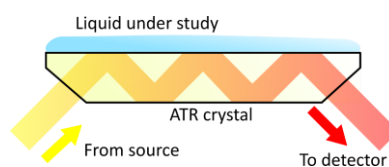

The **diffuse reflectance** module allows characterizing even low reflective samples over the entire spectral range provided by the selected detector while simultaneously blocking specular reflection.

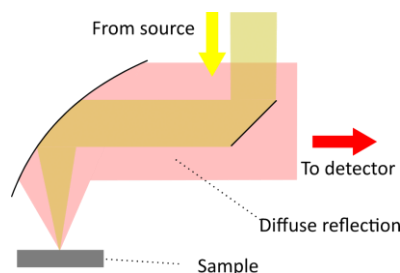

The **transmittance module** uses focused beams to allow characterizing diverse optical components (filters, windows etc.) or liquids in a cuvette.

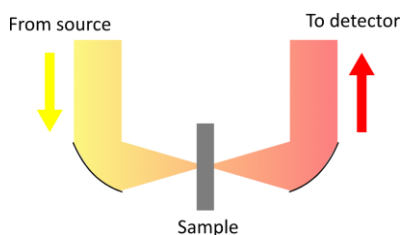

Features


- Internal light source
- Available with LN2 cooled MCT photodetector
- Robust to ambient light perturbation
- Dynamically adjustable resolution:
 - 8cm^{-1}
 - 4cm^{-1}
 - 2cm^{-1}
- Wear free moving parts for extended lifetime
- No purging of the interferometer required
- Temperature controlled reference laser
- Low power consumption
- USB 2.0 or ethernet connection

Specifications

Product code	FTIR-KIT-060-4TE-XXX	FTIR-KIT-120-4TE-XXX	FTIR-KIT-160-LN2-XXX
	- ATR (ATR module) - DRA (Diffuse reflectance module) - TRA (Transmittance module)		
Beam-splitter material	CaF ₂	ZnSe	
Spectral Range [cm ⁻¹]	5'000-1'660	5'000 – 830	5'000 – 650
Spectral Range [μm]	2-6	2-12	2-16
Detector Type	MCT (4-TE cooled)		MCT (LN2 cooled)
Detector peak D* [cm Hz ^{1/2} W ⁻¹]	>1 x10 ¹¹	>4x10 ⁹	>5x10 ¹⁰
Signal-to-noise ratio	> 80'000:1 ⁱⁱ	> 40'000:1 ⁱⁱ	> 70'000:1 ⁱⁱ
Internal reference laser	850nm		
Power requirement	40W @12VDC		30W @12VDC
Integrated light source	20W SiC globar		
Interferometer type	Permanently aligned, double retro-reflector design		
Resolution [cm ⁻¹]	2, 4, 8 (user selectable)		
Wavenumber repeatability	<10PPM		
Scan frequency	>4 Hz @ 4cm ⁻¹		
A/D Converter	24 bit		
Operating temperature	10°C-40°C		
Communication	USB 2.0 / Ethernet		
Software Interface	Windows 10/11 API for controlling the instrument via our DLL		
Dimensions	180mm x 160mm x 80mm		
Weight	2200 g (excluding LN2 dewar)		

DUAL DETECTOR CONFIGURATION

The performances of the FT-IR spectrometer can be greatly enhanced by integrating a second detector (dual detector configuration) that will boost the signal-to-noise ratio substantially over a selected spectral range (usually 2-6 μm).

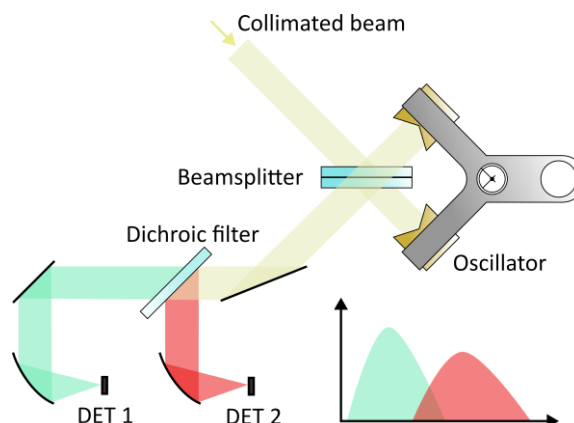

ⁱ Measured with a 20W halogen lamp in transmission mode, 60s measurement, around peak sensitivity wavelength, Norton-Beer weak apodization, linearly corrected baseline, resolution setting 4 cm⁻¹

ⁱⁱ Measured with a silicon carbide (SiC) source (~1550K) in transmission mode, 60s measurement, around peak sensitivity wavelength, 4cm⁻¹, Norton-Beer weak apodization.

SPECIFICATIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE. Please contact info@arcoptix.com for more information.